


MSP-T Thermistor protection unit

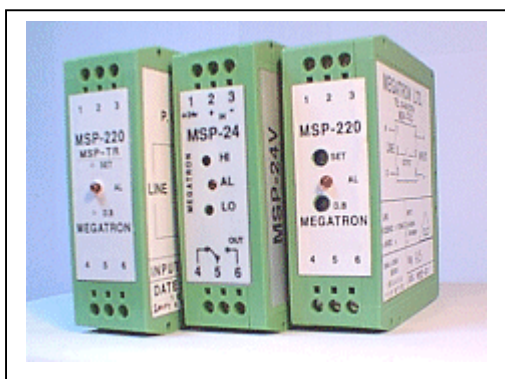

◆ Features ◆

- ✓ Alarm relay
- ✓ Thermistors input
- ✓ Compact construction
- ✓ Screw terminal connection
- ✓ 3 years warranty

◆ Specification ◆

Power supply: 230±15% VAC

Input: thermistor ,type PTC

Output: relay N.O 250VAC/5A

Option: internal jumper for change operation mode of relay - FSL or FSH

Ambient Temp.: -20 ÷ +65 °C

Enclosure: plastic case UEGM 25

Size: W 25 x H 79 mm and depth D 93 mm


Protection category: IP-40

Connection: screw terminals for 2.5 mm² wires max

Mounting: DIN-rail


◆ Description ◆

MSP-T - set-point units for PTC thermistors (thermal dependent resistance) provides NO contacts change when Temperature exceeds value TNF of thermistor (see drawing).




◆ Calibration ◆

✓ Output relay is the FSH. It means, released when the temp. is above a set point and activated when it is under. The change to the FSL can be done by internal jumper (see drawing).

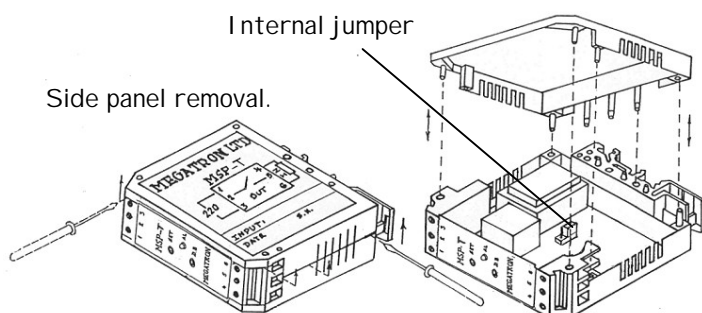

◆ Connection ◆

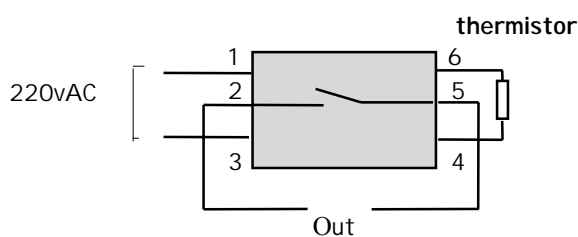

MSPT-P-1-8-E